

Specialists in Liquid Filling Capping and Labeling Solutions

DAB-8-2 Heavy-Duty - Semi-Automatic Benchtop Series

General Overview

- Doubles the production rate when compared to our AB series model
- Filling speed adjustable from 16-174 cycles per minute
- Durable stainless steel structure
- Modular design with built-in expansion capability for production changes
- Heavy-Duty base frame with diving nozzles available
- Fill Volumes from 1ml to 260ml depending on the application




Unique Performance. Undeniable Quality. Unrivaled Support. Go Further, Do More with Filamatic.



Equipment Specifications

Technical Features

- Fill accuracy + / 0.5%
- Optional diving nozzle mechanism available
- Product may be supplied from floor level, overhead, or a pressurized source depending on piston pump system selected
- Ability to fill a wide range of containers such as plastic and glass bottles, pouches, syringes, and test tubes
- Manufactured in the USA

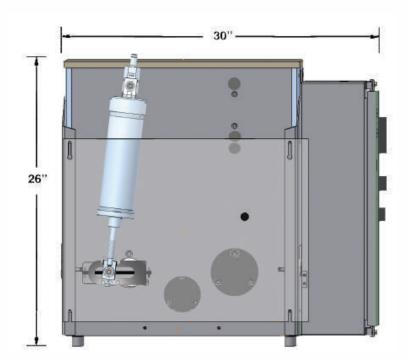

Model	Fill Stations	Volts	RPM	Fill Size
DAB-32-2	2	220V	Up to 24	1ml to 1100ml
DAB-32-4	2	220V	Up to 24	1ml to 1100ml
DAB-A-32-2	2	30-40 scfm	Up to 24	1ml to 1100ml